

Архангельск (8182)63-90-72 Астана (7172)727-132 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Волгоград (844)278-03-48
 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89 Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Липецк (4742)52-20-81 Магнитогорск (3519)55-03-13 Москва (495)268-04-70
 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42
 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Пермь (342)205-81-47 Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78
 Севастополь (8692)22-31-93 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35 Тверь (4822)63-31-35 Томск (3822)98-41-53
 Тула (4872)74-02-29 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Ярославль (4852)69-52-93

Единый адрес: ath@nt-rt.ru | http://albright.nt-rt.ru

Application	Interrupted	Uninterrupted
Thermal Current Rating (I_{th})	▲	100A
Intermittent Current Rating:		
30% Duty	▲	180A
40% Duty	▲	160A
50% Duty	▲	140A
60% Duty	▲	130A
70% Duty	▲	120A
Rated Fault Current Breaking Capacity (I_{cn}) 5ms Time Constant: (in accordance with UL583*)		
SU60	▲	500A at 48V D.C.
SU60B	▲	500A at 96V D.C.
Rated Fault Current Breaking Capacity (I_{cn}) Resistive Load: (in accordance with UL508*)		
SU60	▲	150A at 48V D.C.
SU60B	▲	150A at 96V D.C.
Maximum Recommended Contact Voltages (U_e):		
SU60	▲	48V D.C. 60V D.C.
SU60B	▲	96V D.C.
Typical Voltage Drop per pole across New Contacts at 100A	▲	<50mV
Mechanical M.T.B.F	▲	>3 x 10 ⁶
Coil Voltage Available (U_s)	▲	From 6 to 130V D.C.
Coil Power Dissipation:		
Highly Intermittent Rated Types	▲	14 - 21 Watts
Intermittently Rated types	▲	10 - 14 Watts
Prolonged Rated Types	▲	7 - 10 Watts
Continuously Rated Types	▲	5 - 7 Watts
Maximum Pull-In Voltage (Coil at 20° C) Guideline:		
Highly Intermittent Rated types (Max 25% Duty Cycle)	▲	60% U_s
Intermittently Rated types (Max 70% Duty Cycle)	▲	60% U_s
Prolonged Operation (Max 90% Duty Cycle)	▲	60% U_s
Continuously Rated Types (100% Duty Cycle)	▲	66% U_s
Drop-Out Voltage Range	▲	10 - 25% U_s
Typical Pull-In Time	▲	15ms
Typical Drop-Out Time (N/O Contacts to Open):		
Without Suppression	▲	6ms
With Diode Suppression	▲	35ms
With Diode and Resistor (Subject to resistance value)	▲	8 - 20ms
Typical Contact Bounce Period	▲	3ms
Operating Ambient Temperature	▲	- 40° C to + 60° C
Guideline Contactor Weight:		
SU60	▲	217 gms
With Auxiliary	▲	+ 20 gms
With Blowouts	▲	+ 5 gms
Auxiliary Details		
Auxiliary Thermal Current Rating	▲	5A
Auxiliary Contact Switching Capabilities (Resistive Load):		
	SU60C	SU60A
▲	5A at 24V D.C.	
▲	1A at 60V D.C.	
▲	0.5A at 120V D.C.	
▲	0.25A at 240V D.C.	
Advised Connection Sizes for Maximum Continuous Current		
Copper busbar	▲	64.5mm ² [0.1inch ²]
Cable	▲	Rated suitable for Application
Key: ▲ = Interrupted ▲ = Uninterrupted		
Note: Where applicable values shown are at 20° C		
* Please check our web site for product UL status		



The SU60 is a high rated freestanding compact contactor devised for both interrupted and uninterrupted loads, and is suitable for switching Resistive, Capacitive and Inductive loads. Typical applications include motors as used on small electric vehicles and hydraulic power packs.

- **Interrupted** current - opening and closing on load with frequent switching (results in increased contact resistance).
- **Uninterrupted** current - no or infrequent load switching requirements (maintains a lower contact resistance).


The SU60 features single pole double breaking main contacts with silver alloy tips, which are weld resistant, hard wearing and have excellent conductivity. The SU60 has M8 stud main terminals and 6.3mm spade coil connections. It can be mounted via M4 tapped holes or mounting brackets – either supplied fitted, or as separate items. Mounting can be on the side or base of the contactor.



SU60

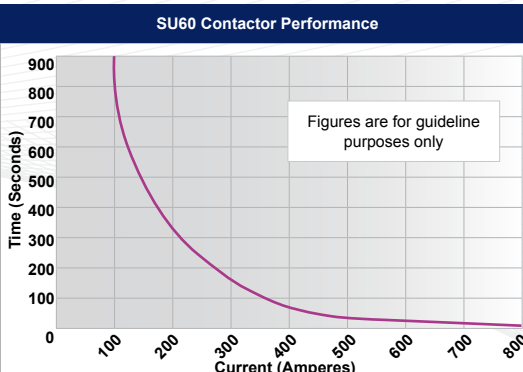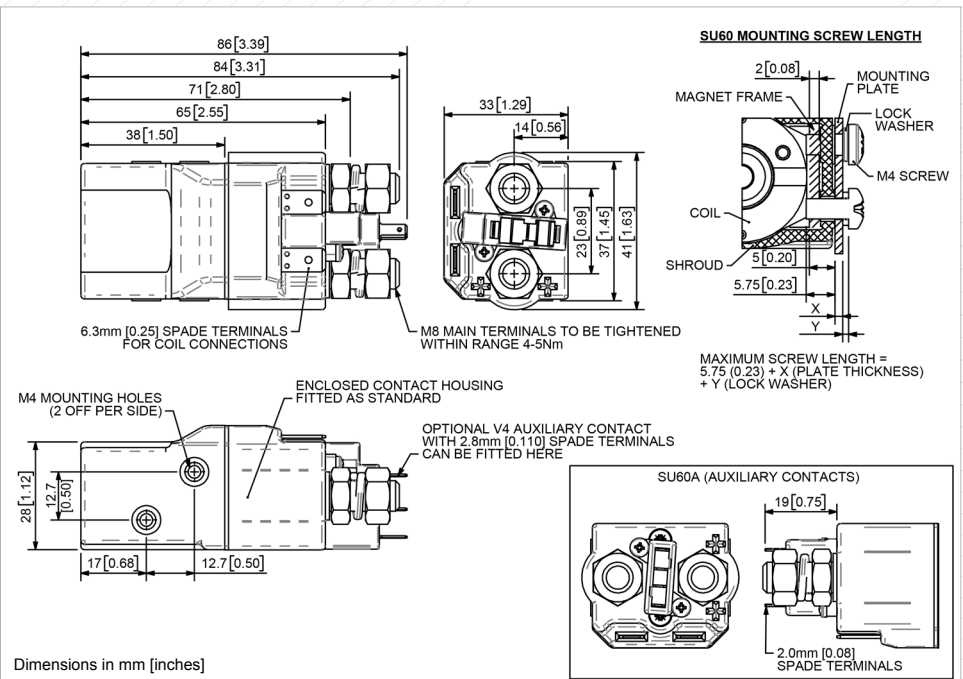

Contact Performance Key:
 — Interrupted & Uninterrupted Current

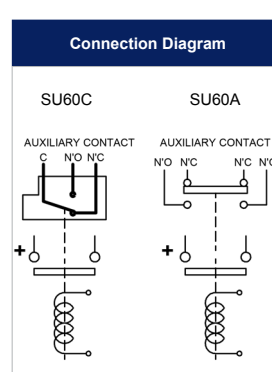

SU60 Available Options		
General		Suffix
Auxiliary Contacts	○	A
Auxiliary Contacts - V4	○	C
Magnetic Blowouts†	○	B
Magnetic Blowouts - High Powered†	X	
Armature Cap	X	
Mounting Brackets (See Stud Contactor Series Catalogue)	○	
Magnetic Latching† (Not fail safe)	○	M
Closed Contact Housing ‡	●	
Environmentally Protected IP66 (see SU60P Catalogue sheet)	○	P
EE Type (Steel Shroud)	X	
Contacts		
Large Tips	○	L
Textured Tips	○	T
Silver Plating	X	
Coil		
AC Rectifier Board (Fitted)	X	
Coil Suppression†	○	
Flying Leads	X	
Manual Override Operation	X	
M4 Stud Terminals	○	
M5 Terminal Board	X	
Vacuum Impregnation	X	
Key: Optional ○ Standard ● Not Available X		
† Connections become polarity sensitive		
‡ Open Housing Available		